


# SK 28/38 SMALL KITCHEN



## Layout and Dimensions

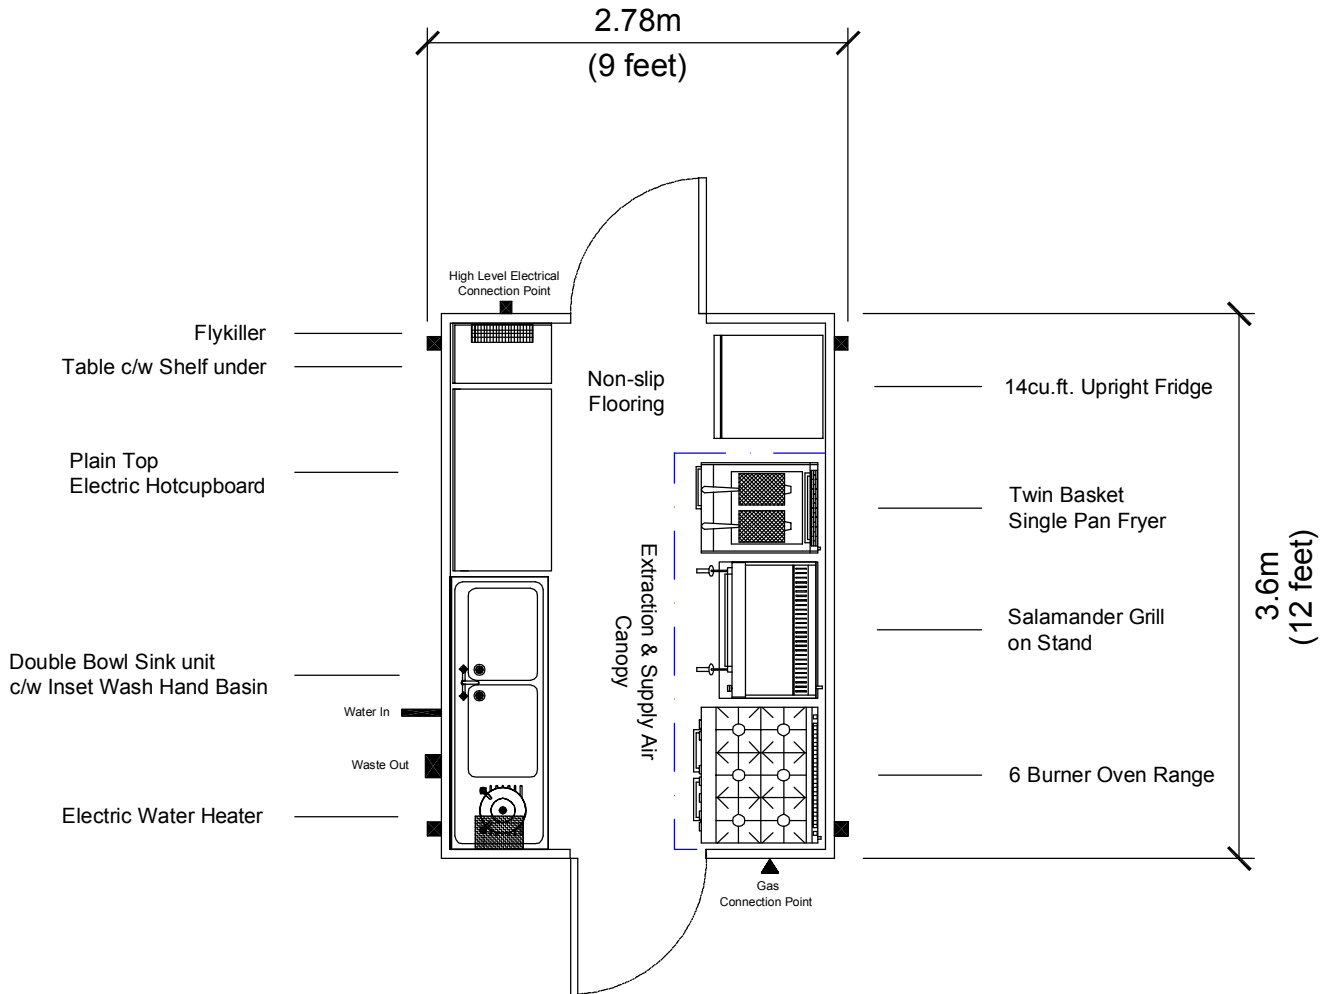

SCALE 1:50

## General Description


The SK 28/38 is a small but versatile and convenient unit designed for multi-purpose use. Offering a wide range of standard equipment, this cabin includes a serving hatch and sufficient space for two chefs to work comfortably. This production kitchen is ideal for any festival, event or small catering operation and yet - depending upon your menu - it is also capable of producing a large number of meals per session. Although worktop space is compact, the SK 28/38 can be adapted to meet your individual requirements by the application of optional equipment from our hire fleet stock.

# SK 28/38 SMALL KITCHEN



## Equipment Specifications - Standard Layout

6 Burner Oven Range on Lockable Castors	Stainless Steel Extraction and Supply Air Canopy c/w Interlock and Fire Suppression
Large Salamander Grill on Mobile Stand or Table	Integral Serving Hatch in prep side wall
Twin Basket Single Pan Deep Fat Fryer	Foodsafe wipe-clean walls and ceiling surfaces
Single Door 14cu.ft. Upright Refrigerator	Non-slip safety flooring in either heat-welded vinyl or aluminium dural checker-plate finish
Stainless Steel Table c/w Undershef	Hygienic Vapourproof Fluorescent lighting
Electric Plain Top Hotcupboard	Wall-mounted Flykiller
Double Bowl Single Drainer Sink unit c/w Inset Wash Hand Basin and Undershef	Wall-mounted Soap Dispenser
Electric Wall-mounted Water Heater	Wall-mounted Disposable Towel Dispenser

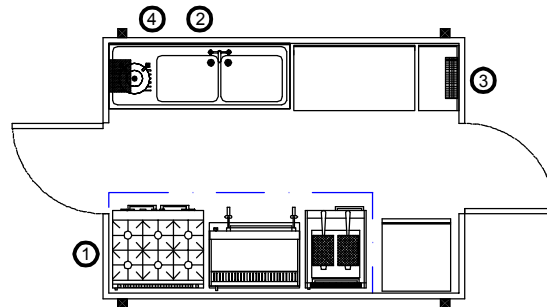

### Technical Specifications

Internal height:	2.3m (7 feet 6½")
External Length:	3.6m (11 feet 9¾")
External Width:	2.78m (9 feet 1½")
External Height:	2.84m (9 feet 3¾")
External Height on Lorry:	4.5m (14 feet 9¼")
Weight:	2.5 tonnes (approx.)

### Services Connections

①	Gas:	¾" BSP connection to Auto-Changeover Valve for a minimum 2no. 47kg LP Gas Cylinders.
②	Water:	15mm Cold Water Inlet for connection to Mains supply @ 2 bar minimum pressure.
③	Electrics:	63 Amp 230 Volt 1Ø (Single Phase) high level connection via Commando Socket. Amperage rating is for connected load total without allowance for diversity.
④	Waste:	40mm (1½") Plastic Waste outlet connection.